


IPMM Inspection Data

Model No. IPMM200005110 -1
 Fiber Type: 250 μ m Fiber(SMF-28)
 Connector: None

Package Dimensions:
 All Dimensions are mm

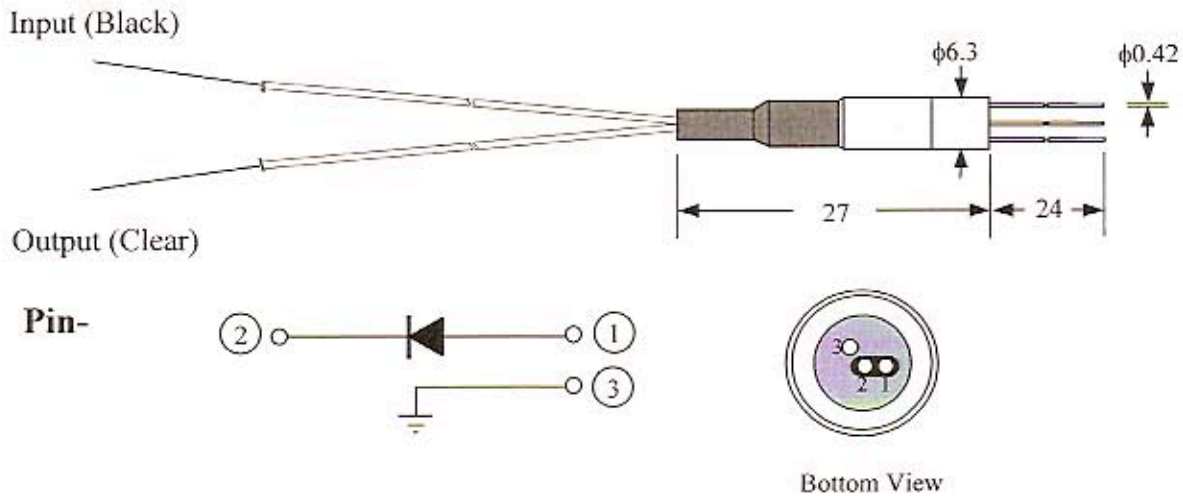

Performance:

S/N	Signal Channel(passband: 1525~1565nm)			Optical Monitor(output => PD)		
	Insertion Loss (dB)	PDL (dB)	Return Loss (dB)	Net Responsivity (mA/mW)	PDL (dB)	Dark Current (nA)
80132650	0.61	0.01	55	0.038	0.02	0.1

Note: 1) All Data are tested @1547nm wavelength / -5V PD bias voltage
 2) Net Responsivity = I_{pd}/P_{out}

Test by: Ana M-J

Check by: *[Signature]*

Q.A. by:

Date: 6-8-01

Date: 6-8-01

Date:

