

0306 WDM for Raman

W1032-S



1x2 Raman Pump WDM Combiner: 1430 nm to 1472 nm/1478 nm to 1515 nm

This WDM based pump combiner utilizes Raman pump filter technology to combine two bands of wavelength. It features low insertion loss, low PDL, and negligible PMD. This device is used for building broadband, low noise Raman amplifiers for ultra-long haul networks.


FEATURES

- Low Insertion Loss
- Low PDL
- Negligible PMD
- High Stability and Reliability

USE IN

- Building Broadband
- Low-noise EDFAs
- Raman Amplifiers for Ultra-long Haul Networks

MECHANICAL DRAWING

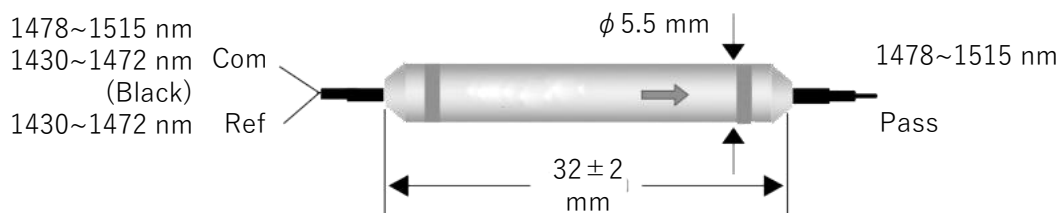

Pass Channel C→P	Wavelength Range λ_p	1478 nm to 1515 nm
	Insertion Loss	0.80 dB max.
	Flatness	0.20 dB max.
	Isolation@ λ_R	N/A
	PDL	0.15 dB max.
	Directivity P→R	55 dB min.
Reflection Channel C→R	Wavelength Range λ_R	1430 nm to 1472 nm
	Insertion Loss	0.60 dB max.
	Flatness	0.20 dB max.
	Isolation@ λ_p	N/A
	PDL	0.15 dB max.
	Directivity R→P	55 dB min.
Return Loss		50 dB min.
Dimension		5.5±0.2x5.5±0.2x32±2 mm

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 μ m, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.