

# 0604 PM DWDM 100 G

W11XX-P



## 100 GHz Spacing DWDM Filters (ITU Grid, 0.8 nm), PM

The DWDM is designed for long-haul transmission where wavelengths are packed tightly together. The 100 GHz spacing DWDM filters allow system designers optimal configuration flexibility. They feature low insertion loss, high channel isolation, and excellent environmental stability and reliability. They can be used for DWDM module & system, Pon networks and HFC links.


### FEATURES

- 0.8 nm Channel Spacing
- High Return Loss
- High Isolation
- High Stability and Reliability
- Low Insertion Loss

### USE IN

- DWDM Module
- DWDM System
- Pon Networks
- HFC links

### MECHANICAL DIAGRAM

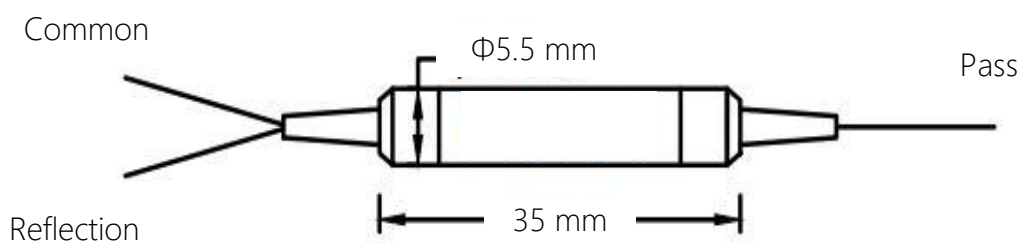

### ORDERING OPTIONS

W11XX-P

XX: Channel Number  
01, 02,... 65

Example

01=W1101-P 1577.03 nm  
02=W1102-P 1576.20 nm  
...  
65=W1165-P 1608.33 nm

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.  
**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**  
**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**

## 0604 PM DWDM 100 G

W11XX-P

Channel Space	100 GHz
Center Wavelength	ITU Grid
Center Wavelength Accuracy	±0.05 nm
Channel Pass band (@ -0.5 dB)	0.22 nm
Pass Channel Insertion Loss	1.0 dB max.
Reflection Channel Insertion Loss	0.4 dB max.
Transmission Isolation @ Reflection Wavelength	30 dB min.
Reflection Isolation @ Transmission Wavelength	10 dB min.
Channel Flatness	0.3 dB max.
Extinction Ratio	18 dB min.
Wavelength Thermal Stability	0.003 nm/°C max.
Insertion Loss Thermal Stability	0.005 dB/°C max.
Return Loss	50 dB min.
Power Handling	500 mW max.
Fiber Type	PM Panda Fiber
Operating Temperature	0°C to +75°C
Storage Temperature	-40°C to +85°C

\* For device with connectors, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.  
**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**  
**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**

## 0604 PM DWDM 100 G

W11XX-P

### Selection Guide (Channel 01-65)

ITU Grid	Channel	Frequency	Part No.
01	1577.03 nm	190.1 THz	W1101-P
02	1576.20 nm	190.2 THz	W1102-P
03	1575.37 nm	190.3 THz	W1103-P
04	1574.54 nm	190.4 THz	W1104-P
05	1573.71 nm	190.5 THz	W1105-P
06	1572.89 nm	190.6 THz	W1106-P
07	1572.06 nm	190.7 THz	W1107-P
08	1571.24 nm	190.8 THz	W1108-P
09	1570.42 nm	190.9 THz	W1109-P
10	1569.59 nm	191.0 THz	W1110-P
11	1568.77 nm	191.1 THz	W1111-P
12	1567.95 nm	191.2 THz	W1112-P
13	1567.13 nm	191.3 THz	W1113-P
14	1566.31 nm	191.4 THz	W1114-P
15	1565.50 nm	191.5 THz	W1115-P
16	1564.68 nm	191.6 THz	W1116-P
17	1563.86 nm	191.7 THz	W1117-P
18	1563.05 nm	191.8 THz	W1118-P
19	1562.23 nm	191.9 THz	W1119-P
20	1561.42 nm	192.0 THz	W1120-P
21	1560.61 nm	192.1 THz	W1121-P
22	1559.79 nm	192.2 THz	W1122-P
23	1558.98 nm	192.3 THz	W1123-P
24	1558.17 nm	192.4 THz	W1124-P
25	1557.36 nm	192.5 THz	W1125-P
26	1556.55 nm	192.6 THz	W1126-P
27	1555.75 nm	192.7 THz	W1127-P
28	1554.94 nm	192.8 THz	W1128-P
29	1554.13 nm	192.9 THz	W1129-P
30	1553.33 nm	193.0 THz	W1130-P
31	1552.52 nm	193.1 THz	W1131-P
32	1551.72 nm	193.2 THz	W1132-P

ITU Grid	Channel	Frequency	Part No.
33	1550.92 nm	193.3 THz	W1133-P
34	1550.12 nm	193.4 THz	W1134-P
35	1549.32 nm	193.5 THz	W1135-P
36	1548.51 nm	193.6 THz	W1136-P
37	1547.72 nm	193.7 THz	W1137-P
38	1546.92 nm	193.8 THz	W1138-P
39	1546.12 nm	193.9 THz	W1139-P
40	1545.32 nm	194.0 THz	W1140-P
41	1544.53 nm	194.1 THz	W1141-P
42	1543.73 nm	194.2 THz	W1142-P
43	1542.94 nm	194.3 THz	W1143-P
44	1542.14 nm	194.4 THz	W1144-P
45	1541.35 nm	194.5 THz	W1145-P
46	1540.56 nm	194.6 THz	W1146-P
47	1539.77 nm	194.7 THz	W1147-P
48	1538.98 nm	194.8 THz	W1148-P
49	1538.19 nm	194.9 THz	W1149-P
50	1537.40 nm	195.0 THz	W1150-P
51	1536.61 nm	195.1 THz	W1151-P
52	1535.82 nm	195.2 THz	W1152-P
53	1535.04 nm	195.3 THz	W1153-P
54	1534.25 nm	195.4 THz	W1154-P
55	1533.47 nm	195.5 THz	W1155-P
56	1532.68 nm	195.6 THz	W1156-P
57	1531.90 nm	195.7 THz	W1157-P
58	1531.12 nm	195.8 THz	W1158-P
59	1530.33 nm	195.9 THz	W1159-P
60	1529.55 nm	196.0 THz	W1160-P
61	1611.79 nm	196.1 THz	W1161-P
62	1610.92 nm	196.2 THz	W1162-P
63	1610.06 nm	196.3 THz	W1163-P
64	1609.19 nm	196.4 THz	W1164-P
65	1608.33 nm	196.5 THz	W1165-P

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.