




IMP-850-40-PM

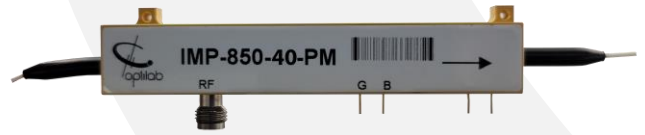

DEVICE

850 nm, 40 GHz Intensity Modulator, PM Output

OVERVIEW

The Optilab IMP-850-40-PM Intensity Modulator is designed for analog modulation of up to 40 GHz for satellite links, antenna remoting, and RF over Fiber. Featuring an Annealed Proton Exchange (APE) waveguide, this modulator provides low insertion loss, low Vpi, and high-power handling capability. It has an operating temperature tolerance ranging from -10 °C to +55 °C, and superior insertion loss provides for its maximum transmission power. The IMP-850-40-PM uses Polarization Maintaining (PM) input and output fibers. Contact Optilab for more information.


FEATURES

- 40 GHz Bandwidth
- Polarization Maintaining output
- 850 nm operating wavelength
- Low insertion loss, low Vpi
- High input power handling capability
- Lump electrode design

USE IN

- Analog Modulation
- Pulse Generation
- Research & Development
- Quantum Photonics
- Active Mode Locking Laser

FUNCTIONAL DIAGRAM

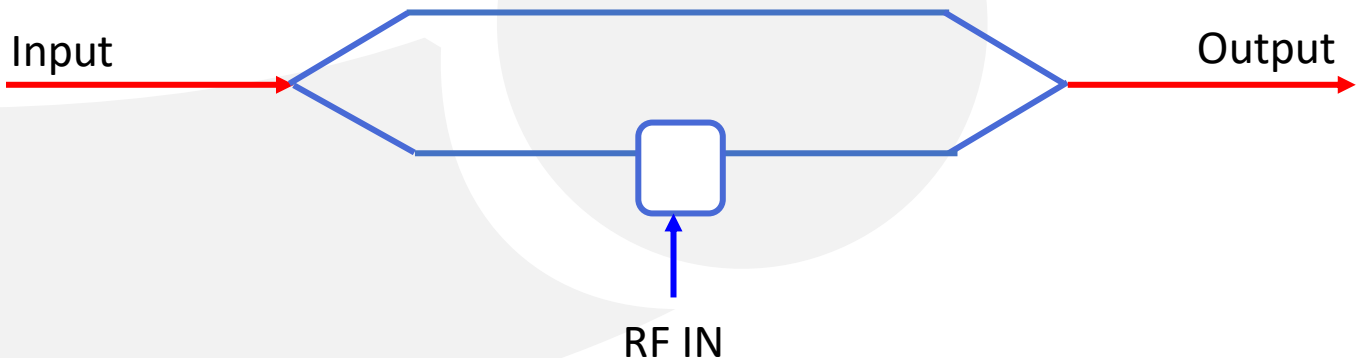



IMP-850-40-PM

SPECIFICATIONS

Input Optical Power	> 20 mW
Operating Wavelength	850 +/- 20 nm
Chirp Value	< ± 0.2 (zero chirp design)
Insertion Loss	4.2 dB typ., 5 dB max.
Extinction Ratio	≥ 25 dB min. (≥ 30 dB min. HER version)
Optical Return Loss	≤ -45 dB
S21 Bandwidth (RF Port)	30 GHz typ.
V _π (RF Port)	5.5 V typ., 6 V max. @ 10 GHz

GENERAL

MECHANICAL

Operating Temperature (Standard)	-10 °C to +55 °C
Storage Temperature	-30 °C to +80 °C
Operating Humidity	0% to 90% Relative Humidity
Input/Output Fiber Type	Corning PM85-U400
Input/Output Connector	FC/APC
Material	LiNbO3
Crystal Orientation	X-cut, Y-propagating
Waveguide Process	Annealed Proton Exchange
RF Port Connectors	GPO male
Cabling	900 μm tubing
Dimensions	2.56" x 0.45" x 0.19"

OPTIONS

IMP-850-40-PM-XXX

XXX HER: High Extinction Ratio





IMP-850-40-PM

MECHANICAL DRAWING

