

PGL-1550-PM-R



DEVICE

1550 nm Programmable Picosecond Laser, PM, w/Integrated Pulse Generator

OVERVIEW

The Optilab PGL-1550-PM-R is a programmable laser that produces picosecond pulses with pulse generator integrated. It functions as a seed pulse generator for Master Oscillator Power Amplifiers (MOPA). The PGL- 1550-PM-R is designed to produce < 100 ps widths and corresponding repetition rates up to 100 MHz from the user’s electrical pulse generator. It features a high Extinction Ratio (ER) Mach-Zehnder Interferometer (MZI) optical modulator with a high pulse contrast of -30 dB. The PGL-1550-PM-R consists of a narrow-line- width, ultra stable, DFB laser diode, centered at 1550 nm transmission wavelength, but with the flexibility to offer wavelengths above 1563 nm upon request. The DFB laser operates under Continuous Wave (CW) mode, modulated by a high speed modulator rise time of less than 35 ps. The Automatic Bias Controller (ABC) board is used to properly maintain the bias point of the optical modulator and ensure jitter free, ultra-fast pulse generation. The PGL-1550-PM-R incorporates 25/300 Large Diameter Fiber (LDF) to overcome non-linear effect. It features PM fiber for polarization maintaining, and is available with an optional PM EDFA to boost peak pulse power. The laser system is equipped with a standard remote control interface (RS-232) and an LCD display screen for easy user interface, accessible through a front panel adjustment knob. Contact Optilab for more information.


FEATURES


- High Pulse Contrast of -30 dB
- Fixed Pulse Width of 100 ps
- Uses external electrical input
- Optional PM high power collimator
- Optional high power PM EDFA
- 1540-1563 nm laser adjustable +/- 1.5 nm
- High speed optical modulator with < 35 ps rise time
- Collimated output available

USE IN

- Picosecond pulse generator
- Research & development
- Test & measurement
- Master Oscillator Power Amplifier (MOPA)

FUNCTIONALDIAGRAM

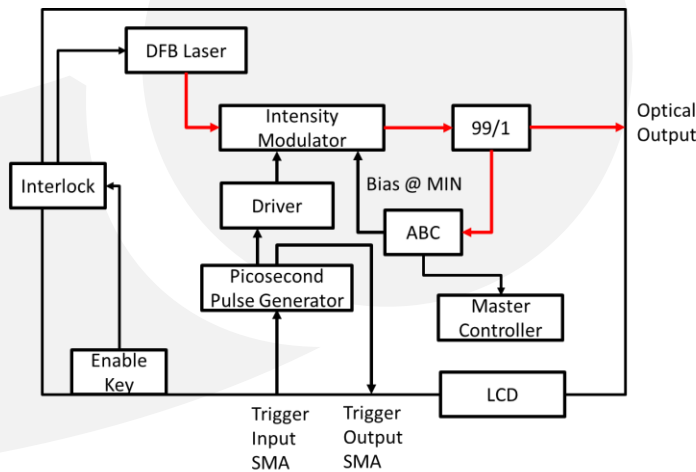

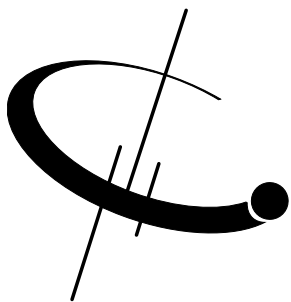

PGL-1550-PM-R

SPECIFICATIONS

OPTICAL


Wavelength	1540 nm to 1563 nm
Wavelength Tuning Range	Up to ± 1.5 nm
Fixed Pulse Width	100 ps
Modulator Rise/Fall Time	< 35 ps
Source Laser Linewidth	< 3 MHz, 1 MHz available
Pulse Repetition Rate	Programmable 100 KHz to 100 MHz depending on electrical pulse
Energy per Pulse	Up to 2 µJ w/ EDFA, at 500 KHz
Pulse Contrast	-30 dB
Peak Power Output (no EDFA)	10 mW peak
Peak Power Output (w/ EDFA)	Up to 1 kW peak
Jitter Relative to RF Reference	10 rms max.
Pulse Amplitude Variation	1% rms max.
Trigger IN Amplitude	300 ~ 500 mVpp
Trigger OUT Amplitude	500 mVpp
Polarization Extinction Ratio	20 dB typ.
Amplitude Stability (short term)	< 1%
Polarization Design	Single linear polarization, slow axis passing


ELECTRICAL PULSE INPUT

Modulator Bandwidth	Up to 20 GHz
Modulator Type	MZI with high ER ratio 40 dB
Input Level	> 0.5 V peak to peak
Pulse Repetition Rate	Programmable 100 KHz to 100 MHz depending on electrical pulse input
Minimal Pulse Width	< 75 ps
Trigger IN/OUT Impedance	50Ω
Electrical Input Frequency	50 KHz to 12 GHz
Electrical Connector	SMA

OPTICAL COLLIMATOR

Collimated Beam Quality	$m^2 < 1.5$
Nominal Beam Diameter	1.2 mm
Average Optical Power	15 W max.
Peak Power for ns Pulse	15 KW max
Fiber Type	PLMA-GDF-25/300





PGL-1550-PM-R

MECHANICAL

Operating Temperature	0°C to +50°C
Storage Temperature	-40°C to +70°C
Humidity	10% to 90%
Power SuPGLy	110 V AC and 220 V AC, 50 or 60 Hz
Display	Temperature, Current, Voltage
Controls/Monitoring	LDC display for Laser Switch, EDFA output power through front panel. See next page.
Communication Interface	RS-232 interface with Ethernet optional
Dimensions	1 RU: 19" x 14" x 1.75"
Optical Connector	SMF-28 FC/APC or user option
Optical Fiber	PANDA Fiber PM
Electrical Connector	SMA Female

ORDERING OPTIONS

PGL-XXXX-Y-PM

XXXX


Wavelength: 1540-1563 nm, user specify

Y

Peak Power in dBm

OPTICAL PULSE OUT

The PGL-1550-PM-R has a linear translation from electrical to optical pulses with a 1:1 ratio. The electrical and optical pulses look nearly identical. The following is a near Gaussian shape 2 ns optical pulse output.

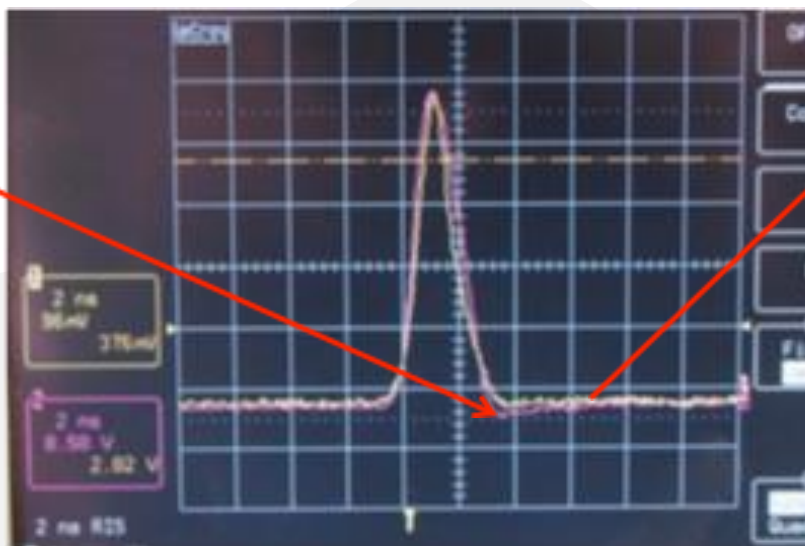

ELECTRICAL PULSE

OPTICAL PULSE

