

# 1501 RF Connector

RFC2004-1



## GPPO (SMPM) to GPPO (SMPM) Adapter 65 GHz


Frequency	0 to 65 GHz
VSWR	1.35 max.
Durability	2000 Cycles min.
Impedance	50 Ohms
Operating Temperature	-55°C to +165°C
Body	Beryllium Copper Gold Plated
Center Conductor	Beryllium Copper Gold Plated
Dielectric	PEI

### ORDERING OPTIONS

GPPO Connector	GPPO Connector	Part No.
Female	Female	RFC2004-1

### MECHANICAL DRAWING

Unit : mm [inch]

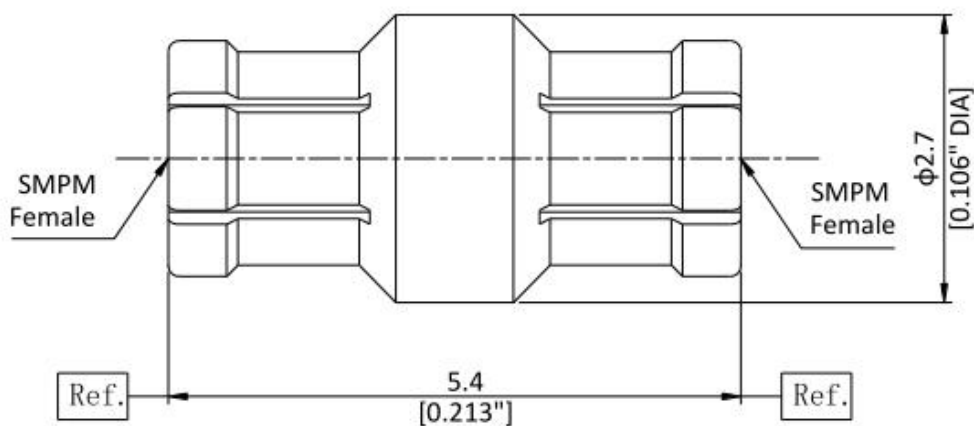

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.  
**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**  
**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**